




Bohrbüchsen

DIN 172 A

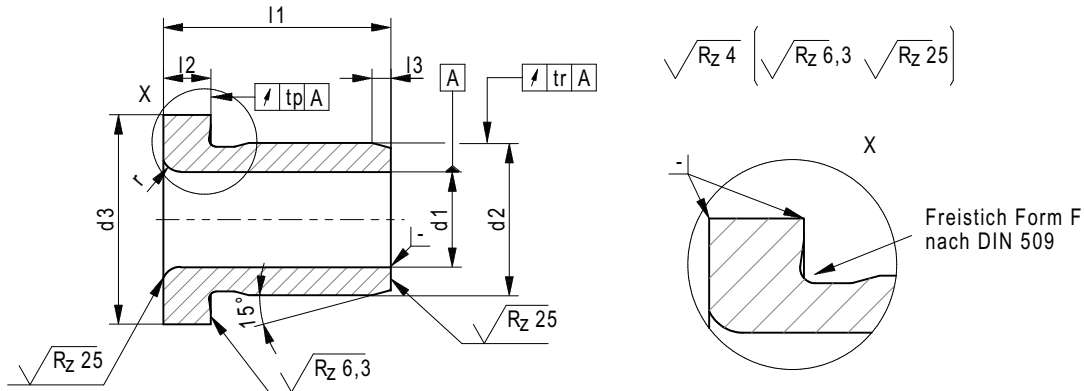

d ₁ - F7		Abstufung	l ₁			d ₂ n6	d ₃	l ₂	l ₃	r	t _r	t _p
über	bis		kurz	mittel	lang							
0,8	1,0	Bohrung d ₁ gestuft < 15 mm, 0,1 mm und 0,25 mm > 15 mm, vorzugsweise 0,5 mm	6	9	-	3	6	2	1	1	0,01	0,03
1,0	1,8					4	7					
1,8	2,6					5	8					
2,6	3,3		8	12	16	6	9	2,5				
3,3	4,0					7	10					
4,0	5,0					8	11					
5,0	6,0		10	16	20	10	13	3	1,25	1,5	0,02	
6,0	8,0					12	15					
8,0	10,0					15	18	4	1,5	2		
10,0	12,0			16	25	18	22					
12,0	15,0			20	36	22	26	5	2,5	3	0,05	
15,0	18,0					26	30					
18,0	22,0			25	45	30	34	6	3	3,5		
22,0	26,0					35	39					
26,0	30,0			30	56	42	46	3	4	0,04		
30,0	35,0					48	52					
35,0	42,0			35	67	55	59	4	4	0,08		
42,0	48,0					70	74					
48,0	55,0			40	78	78	82	4	4			
55,0	63,0					85	90					
63,0	70,0		45	89	95	100	4	4				
70,0	78,0				105	110						
78,0	85,0		45	89	115	120	4	4				
85,0	95,0				125	130						
95,0	105,0											

Werkstoff: 100 Cr6 oder ähnlich
Härte: 740 + 80 HV durchgehärtet
Bestellbeispiel: DIN 172 A d₁ x l₁, DIN 172 A 8,5 x 12



MAKE AG

Bohrbüchsen und Normteile
 Schützenstrasse 19 / Postfach 192
 CH-3627 Heimberg
 Tel: +41 (0)33 439 80 80 Fax +41 (0)33 439 80 81
 info@make-ag.ch / www.make-ag.ch