




# Bohrbüchsen

DIN 179 A

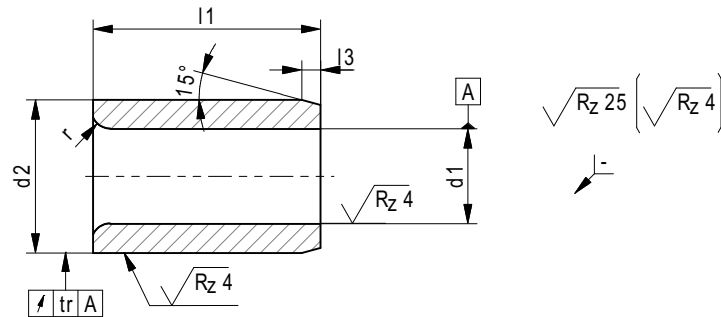

d1 - F7		Abstufung	l1			d2 n6	l3	r	tr
über	bis		kurz	mittel	lang				
0,8	1,0	Bohrung d1 gestuft < 15 mm, 0,1 mm und 0,25 mm > 15 mm, vorzugsweise 0,5 mm	6	9	-	3	1	1	0,01
1,0	1,8					4			
1,8	2,6					5			
2,6	3,3		8	12	16	6			
3,3	4,0					7			
4,0	5,0					8			
5,0	6,0		10	16	20	10	1,25	1,5	0,02
6,0	8,0					12			
8,0	10,0					12	20	25	
10,0	12,0		18	1,5	2				
12,0	15,0		16						
15,0	18,0			26					
18,0	22,0			20	36	45	30	2,5	3
22,0	26,0		35						
26,0	30,0		25				45	56	42
30,0	35,0			48					
35,0	42,0			30	56	67			55
42,0	48,0		62						
48,0	55,0	35	67				78	70	
55,0	63,0			78	3,5				
63,0	70,0			40		78		105	85
70,0	78,0	95							
78,0	85,0	45	89		112		105		4
85,0	95,0			115					
95,0	105,0			125					

**Werkstoff:** 100 Cr6 oder ähnlich  
**Härte:** 740 + 80 HV durchgehärtet  
**Bestellbeispiel:** DIN 179 A d1 x l1, DIN 179 A 10,5 x12



## MAKE AG

Bohrbüchsen und Normteile  
 Schützenstrasse 19 / Postfach 192  
 CH-3627 Heimberg  
 Tel: +41 (0)33 439 80 80 Fax +41 (0)33 439 80 81  
 info@make-ag.ch / www.make-ag.ch