


# DIN 172 A Bohrbüchsen

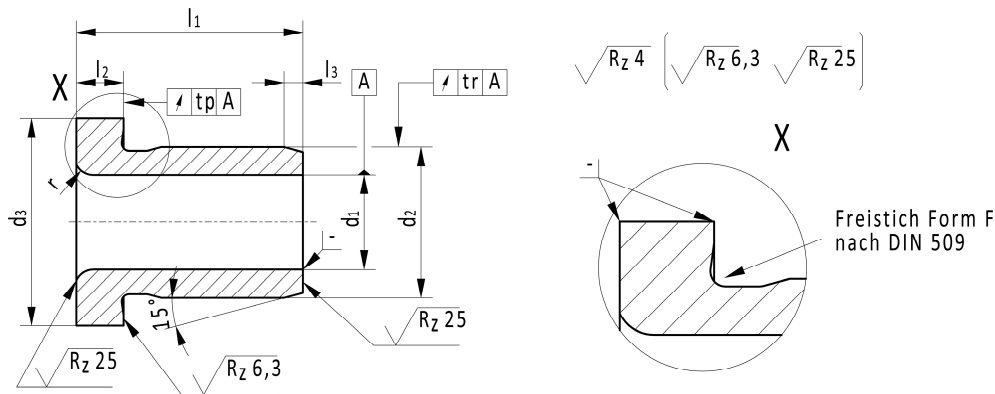

d <sub>1</sub> - F7		Abstufung	l <sub>1</sub>			d <sub>2</sub> n6	d <sub>3</sub>	l <sub>2</sub>	l <sub>3</sub>	r	tr	tp
über	bis		kurz	mittel	lang							
0,5	0,8	Bohrung d <sub>1</sub> gestuft < 15 mm, 0,1 mm und 0,25 mm > 15 mm, vorzugsweise 0,5 mm Abstufungen in 0,01 mm Schritten auf Anfrage	6	9	-	3	6	2	1	1	0,01	0,03
0,8	1,0					4	7					
1,0	1,8					5	8					
1,8	2,6		8	12	16	6	9	2,5	1,25	1,5	0,02	
2,6	3,3					7	10					
3,3	4,0					8	11					
4,0	5,0		10	16	20	10	13	3	1,5	2	0,02	
5,0	6,0					12	15					
6,0	8,0					15	18					
8,0	10,0		12	20	25	18	22	4	1,5	2	0,02	
10,0	12,0					22	26					
12,0	15,0					26	30					
15,0	18,0		16	28	36	30	34	5	2,5	3	0,02	
18,0	22,0					35	39					
22,0	26,0					42	46					
26,0	30,0		25	45	56	48	52	6	3	3,5	0,04	
30,0	35,0					55	59					
35,0	42,0					62	66					
42,0	48,0		30	56	67	70	74	6	3	4	0,04	
48,0	55,0					78	82					
55,0	63,0	85				90						
63,0	70,0	35	67	78	95	100	6	3	4	0,04		
70,0	78,0				105	110						
78,0	85,0				115	120						
85,0	95,0	40	78	105	125	130	6	3	4	0,04		
95,0	105,0				45	89					112	

**Werkstoff:** 100 Cr6 oder ähnlich  
**Härte:** 740 + 80 HV (62 ±2 HRC) durchgehärtet  
**Varianten:** Form B / VSM  
**Bestellbeispiel:** DIN 172 A d<sub>1</sub> x l<sub>1</sub>, DIN 172 A 8,5 x 12