


DIN 172 A Bohrbüchsen

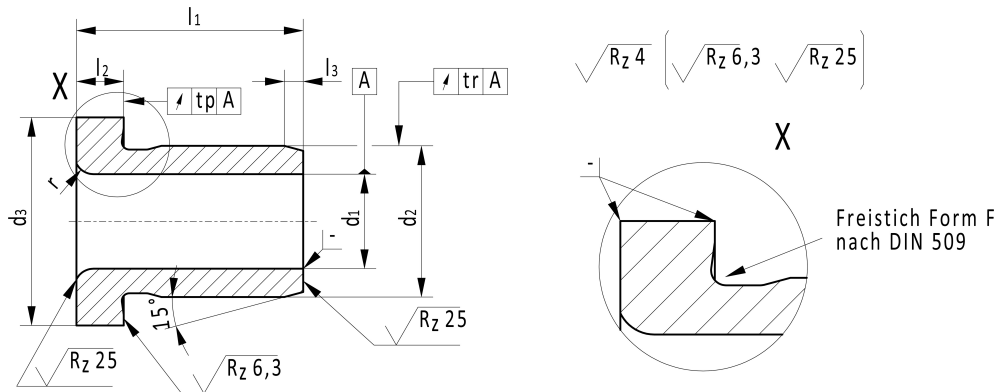

d ₁ - F7		Abstufung	l ₁			d ₂ n6	d ₃	l ₂	l ₃	r	tr	tp
von	bis		kurz	mittel	lang							
0,30	1,00	Bohrung d ₁ gestuft < 15 mm, 0,1 mm und 0,25 mm > 15 mm, vorzugsweise 0,5 mm Abstufungen in 0,01 mm Schritten auf Anfrage	6	9	-	3	6	2	1	1	0,01	0,03
1,01	1,80					4	7					
1,81	2,60					5	8					
2,61	3,30		8	12	16	6	9	2,5				
3,31	4,00					7	10					
4,01	5,00					8	11					
5,01	6,00		10	16	20	10	13	3	1,25	1,5	0,02	
6,01	8,00					12	15					
8,01	10,00		12	20	25	15	18	4	1,5	2	0,02	
10,01	12,00					18	22					
12,01	15,00		16	28	36	22	26	5	2,5	3	0,05	
15,01	18,00					26	30					
18,01	22,00		20	36	45	30	34	6	3	3,5	0,04	
22,01	26,00					35	39					
26,01	30,00		25	45	56	42	46	3	4	0,08		
30,01	35,00					48	52					
35,01	42,00		30	56	67	55	59	6	3	0,08		
42,01	48,00					62	66					
48,01	55,00		35	67	78	70	74	6	3	0,08		
55,01	63,00					78	82					
63,01	70,00	40	78	105	85	90	6	3	0,08			
70,01	78,00				95	100						
78,01	85,00	45	89	112	105	110	6	3	0,08			
85,01	95,00				115	120						
95,01	105,00				125	130						

Werkstoff: 100 Cr6 oder ähnlich
Härte: 740 + 80 HV (62 ±2 HRC) durchgehärtet
Varianten: Form B / VSM
Bestellbeispiel: DIN 172 A d₁ x l₁, DIN 172 A 8,5 x 12